

The NORTHWEST Rotary Tiller

**As Used For The Bed Preparation And Cultivation
Of Asparagus And Other Row Crops**

The NORTHWEST Rotary Tiller may be adjusted to till to a uniform depth in both the top of the bed and the bottom of furrow. The mesh rollers are used to firm the top and sides of the bed and leave enough rough surface to retard wind erosion.




Here a Northwest RB Series is arranged for tilling, forming and firming beds for asparagus and other crops. This view is of a two row unit. Wider sizes may also be furnished.



A two bed tiller is shown forming and tilling the top of the beds only.

NORTHWEST Rotary Tillers are available in sizes from 4' to 20' in width. The "RB" and "D" Series may be adapted for use in vineyards, row crop cultivation, strip tilling, hilling, chemical incorpora-

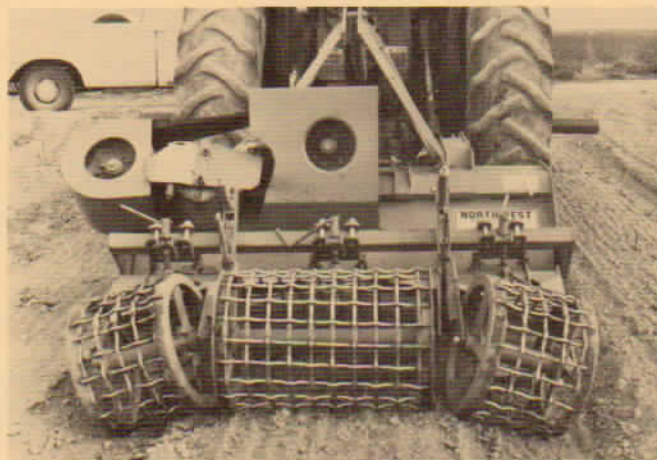

A close up of a one row tiller with mesh rollers.

tion, seed bed preparation and tilling in heavy crop residue. The heavier duty "L" Series will accept tractors up to 225 H.P.

Northwest  **Equipment**
COMPANY

CALL OR WRITE: P. O. BOX 10473, YAKIMA, WASHINGTON 98909

(509) 457-4108